
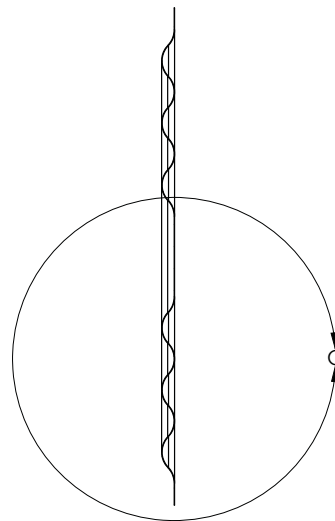


4



3

2

1

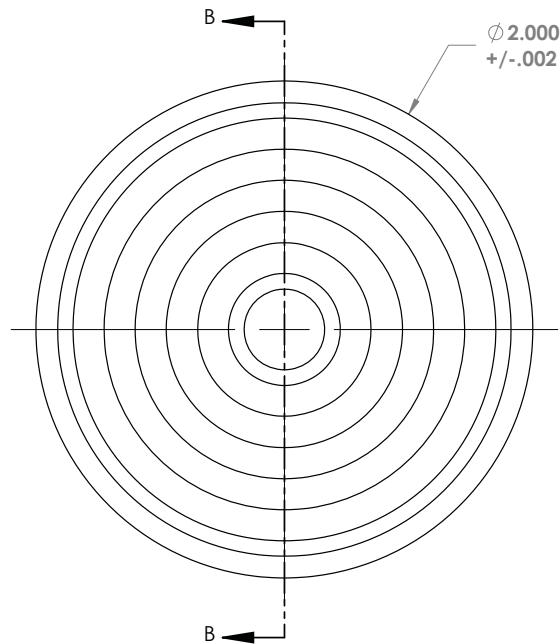

SECTION B-B

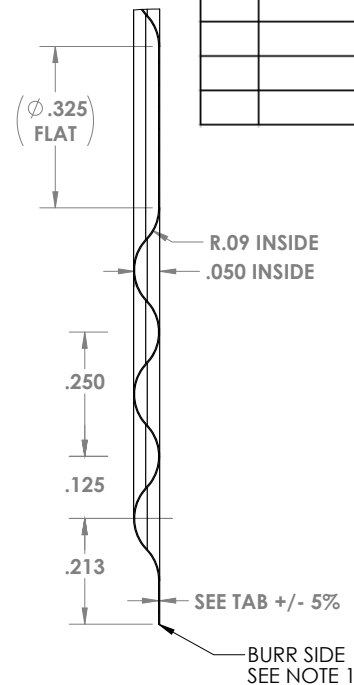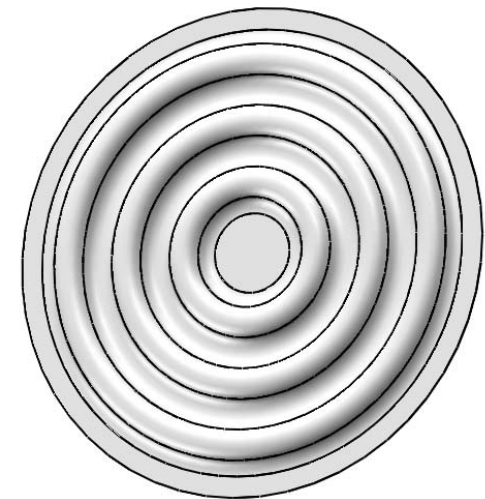DETAIL C
SCALE 4 : 1

GENERAL NOTES:

- 1) BURR TO BE 30% OF MATERIAL THICKNESS
- 2) MAX CAMBER (POTATO CHIPPING) OF 2% OF OD
- 3) ALL RIPPLE DIMENSIONS IN VIEW B ARE TOOL CONTROLLED
- 4) MANUFACTURE DIAPHRAGM FROM TOOL T-LSHP-2.000
- 5) DINGS AND DENTS ACCEPTABLE IF DETECTED ON ONE SIDE ONLY
- 6) DIAPHRAGMS TO BE NESTED AND PACKED TO AVOID DAMAGE

TAB	Part Name	Diameter	Thickness	Material	Specification	Deflection *
-1	LSHP2.000-0020-718	2.000	0.002	IC718	AMS-5596	0.0061
-2	LSHP2.000-0030-316	2.000	0.003	SS316L	AMS-5507	0.0030
-3	LSHP2.000-0030-625	2.000	0.003	IC625	AMS-5599	0.0028
-4	LSHP2.000-0030-718	2.000	0.003	IC718	AMS-5596	0.0029

* Deflections listed at 1.0 psi are simulated results. Actual results may vary.

REV	DESCRIPTION	DATE	INITIALS
C	DEFLECTION CALCULATIONS UPDATED	7/21/2017	JD

NAME	DATE	TITLE: Metal Diaphragm
DRAWN WAGNER	9-22-15	
CHECKED DEBONE	9-22-15	
ENG APPR.		
MFG APPR.		
Q.A.		
HUDSON DEEP DRAW A PRECISION Company		
SIZE B	DWG. NO. LSHP2.000-TAB	REV C
SCALE: 2:1	WEIGHT:	SHEET 1 OF 1

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
TOLERANCES:
FRACTIONAL: $\pm 1/32$
ANGULAR: MACH: $\pm .015$
TWO PLACE DECIMAL $\pm .005$
THREE PLACE DECIMAL $\pm .005$
INTERPRET GEOMETRIC
TOLERANCING PER: ASME Y14.5M94
DO NOT SCALE DRAWING

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
HUDSON TECHNOLOGIES. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
HUDSON TECHNOLOGIES IS PROHIBITED.

4

3

2

1